


WKM43-6M

Power Supply Cable, PUR – Connection Cable



Features

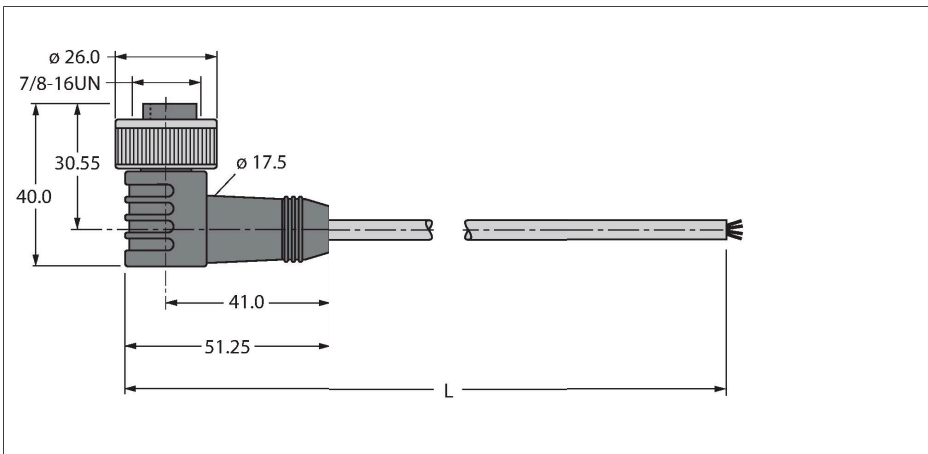


- Power cable: $4 \times 1.5 \text{ mm}^2$
- Jacket material: PUR, color: gray
- Jacket diameter: 7.5 mm
- Suitable for drag chain use
- Oil resistant and flame retardant
- Halogen free
- Open end
- 7/8" female, angled
- Cable length: 6.0 m

Technical data

Type	WKM43-6M
ID	6913940
Connector A	Female, 7/8"-16 UN, Angled
Number of Pins	4
Contacts	Metal, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, TPU, Black
Coupling nut/screw	Brass, CuZn, Nickel-plated
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP67, Only in screwed condition
Cable	
Network protocol	DeviceNet CANopen, 43
Cable diameter	$\varnothing 7.5 \text{ mm} \pm 0.30$
Cable length	6 m
Cable jacket	PUR, Gray
Shielding	no
Core insulation	PP
Core cross-section	$4 \times 1.5 \text{ mm}^2$
Arrangement of strands	$84 \times 0.15 \text{ mm}$
Core colors	BK, RD, GN, WH
Electrical properties at +20 °C	
Rated voltage	250 V
Test voltage	2000 V
Current	5.3 A

Cable Cross-Section

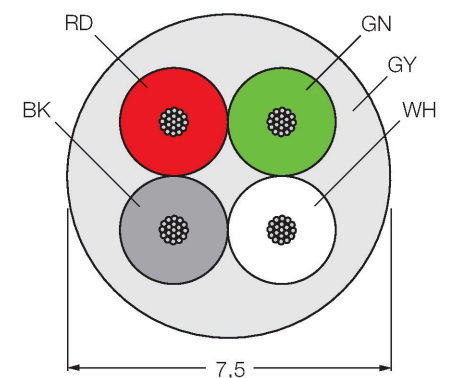

Contact assignment



Circuit Diagram



Technical data

Mechanical and chemical properties	
Bending radius (flexible use)	$\geq 10 \times \varnothing$
Ambient temperature range (stationary)	-40 °C...+90 °C
Ambient temperature range (In motion)	-30 °C...+90 °C
Ambient temperature during drag chain operation	0 °C...+90 °C
Other Features	
Qualified for drag chain use	yes
Halogen-free	yes
Oil-resistant	yes
Flame-retardant	yes
Approvals	CE UKCA