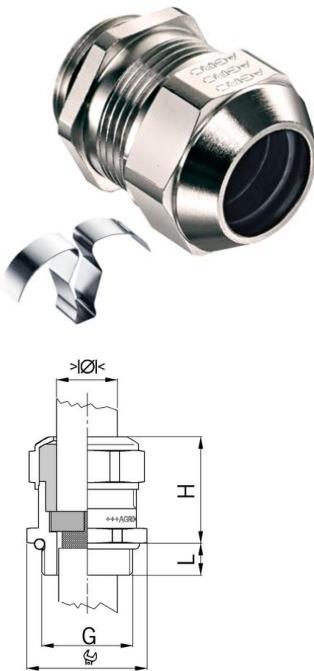


Short entry thread metric


Cable glands Progress® EMC easyCONNECT nickel-plated brass with contact spring
Type approval: Progress MS EMC easyCONNECT

- Two-piece sealing insert
- not overall length insulated

Order number:	1083.32
E-Number	121062808
EAN:	7611614249742
Material	Nickel-plated brass
Contact spring	Spring steel 1.4310
Seal	TPE
O-ring	NBR
Strain relief	Version A acc. to EN 62444
Protection class	IP 68 (up to 10 bar) / IP 69
Properties	For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables
Operation temperature	-60°C / +100°C
Entry thread	M32x1.5
Clamping range with insert min.	17.0 mm
Clamping range with insert max.	21.0 mm
Minimal clamping range	21.0 mm
Maximum clamping range	25.5 mm
Wrench size	36 mm
Dimension H	33 mm
Thread length L	8 mm
Additional note	-
Dispatch	25

1 = One-piece sealing insert

2 = Approvals in preparation

Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.

Available on request:

- Entry thread Pg and NPT
- Executions in steel A2 and A4